
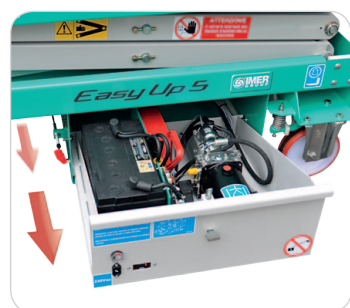


### Standard equipment


- Manual emergency lowering device
- Battery charger with automatic switch-off
- Low battery alert
- Battery switch-off
- Inclinator with cut out and alarm
- Load sensor with audible/visual motion cut out and alarm
- Electrical scissor protection
- Non marking tires
- Cylinder holding valve
- Non-slip deck surface
- Full height access gate with spring-lock

### Benefits


- ✓ Smooth roller castors with non-marking tyres suitable for soft ground
- ✓ It can be driven through standard doorways and carried in passenger elevators
- ✓ Ease of transport thanks to fork lift, lifting points and several slinging hook points
- ✓ Outstanding battery capacity provides long endurance
- ✓ Safe and reliable emergency lowering device with pull-up handle
- ✓ Digital inclinometer with cut out and audible alarm when exceeding the allowable tilt angle (no stabilisers required)
- ✓ Battery charger can be switched on for long periods, ensuring 100% battery charge



All the component parts are easily accessible for servicing.



Winching eye for easy transport.



Auto braking on castors.



Removable control allows for easy and safe movement. Equipped with key switch and emergency stop button.

### EASY UP 5

Number of scissors		3
A	mm	3200
B	mm	5200
C	mm	60
D	mm	1790
E	mm	690
Capacity (including 1 person)	kg	200
Electric motor (power pack)	kW	1.6
Battery	V/Ah	12/105
Battery charger	V	230
Oil tank capacity	l	2
Lifting time	s	17/17
Max side/longitudinal tilt angle	degrees	1.3/2.5
Total weight	kg	390

