

# IM R 19



## Benefits

- ✓ Hydraulically adjustable tracks width: more stability and traction to move around the building site or rough terrain
- ✓ State-of-the-art removable control panel: fast and versatile use of the machine
- ✓ Proportional and simultaneous electro-hydraulic controls: efficiency and safety for operators
- ✓ Automatic outrigger levelling: maximum easiness of use
- ✓ Slewing 360° (not continuous): outstanding aerial accessibility in any work situation
- ✓ Basket rotation  $\pm 75^\circ$ : complete placement on working site in any condition
- ✓ Compact size, with limited overall outrigger footprint
- ✓ Engine guarded for safety and working protection
- ✓ Aluminium platform 1.40x0.70x1.10 mts.
- ✓ Innovative design with fully enclosed structure

360°

Slewing 360° (not continuous): outstanding aerial accessibility in any work situation

Momentum device for improved safety and performance

## Standard equipment

- Automatic outrigger levelling
- Emergency hand pump
- Cylinder holding valve
- Hour meter
- Momentum device
- Load cell
- Hydraulic Jib
- Rubber tracks
- Hydraulically adjustable tracks width
- 230V - 16 A electro-pump for indoor use
- Air / Water outlet in the platform
- 230V - 16 A outlet in the platform
- Removable wired control box
- Double speed traction

## Optionals

- 12 V emergency electro-pump
- Non-marking rubber tracks
- Oversized outrigger pads ( $\varnothing$  350 mm)
- Wireless radio-control box
- Working light in the platform

Working height	m	19
Platform height	m	17
Side outreach	m/kg	9,80 / 80 - 8,50 / 120 - 7,00 / 200
Slewing	(°)	360° (not continuous)
Basket dimensions	m	1,40 x 0,70 x 1,10
Transport length	m	5,3 / 4,63 (without basket)
Transport width	m	Min 0,79 / Max 1,06
Height in stowed position	m	Min 1,99 / Max 2,10 (with stabilizers in position)
Overall outrigger footprint	m	2,910 x 2,980
Driving speed	km/h	0 - 2
Gradeability	(°)	25°
Platform capacity	kg	200
Petrol engine		Honda GX390 - 11 HP 3600 rpm
Diesel engine		Yanmar L100N - 9,9 HP 3600 rpm
Total weight of the machine	kg	2300




Emergency hand pump with ease of access and operation.



Basket mounting system designed for easiness of assembly.



Compactness of the jib ass'y hosting both the load cell and basket rotation system.

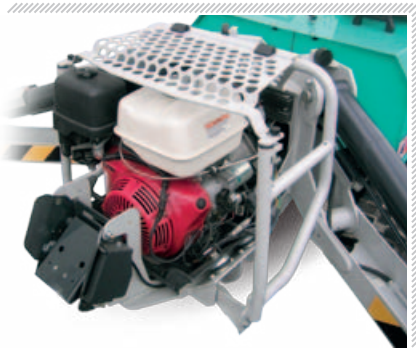

Rugged engine guard for improved protection



Compact dimensions for enhanced accessibility in any working site.

