

SPIN 15 A

Continuous cycle mixer for premixed products in bags

Standard Equipment

- ✓ Single-phase 230V / 50Hz gear cascade gearmotor
- ✓ Self-resetting motor thermal protector
- ✓ Electric control panel with on / off switch
- ✓ Thermal circuit breaker (motor protection) with manual reset
- ✓ Hopper with grate and bag breaker
- ✓ Removable mixing chamber
- ✓ Mixing shaft with Hardox® steel paddles
- ✓ Water system with micrometric flow regulator
- ✓ Self-priming stainless steel electric pump
- ✓ 10 m water hose with quick couplings and 3/4" F quick connection
- ✓ Cardboard packaging

Optional Accessories

- ✓ Glues mixing kit
- ✓ Flow meter kit
- ✓ I-DUST grate

Applications


Ideal for quickly mixing premixed plasters, masonry mortars, selflevelling materials and traditional pre-mixed materials in bags. In combination with a plaster sprayer, it can form a single mixing and pumping unit.

The SPIN 15 A mixer, if provided with special optional kit, is particularly suitable for mixing glues for laying external insulation and tiles.



Spin 15 A Z-Clean

Z-Clean version with **SELF-CLEANING** rubber mixing chamber. The rubber pipe reduces the accumulation of residual material in the mixing chamber and allows easier and faster cleaning at the end of the work. The rubber material reduces noise emissions and increases the operator's comfort in closed environments.

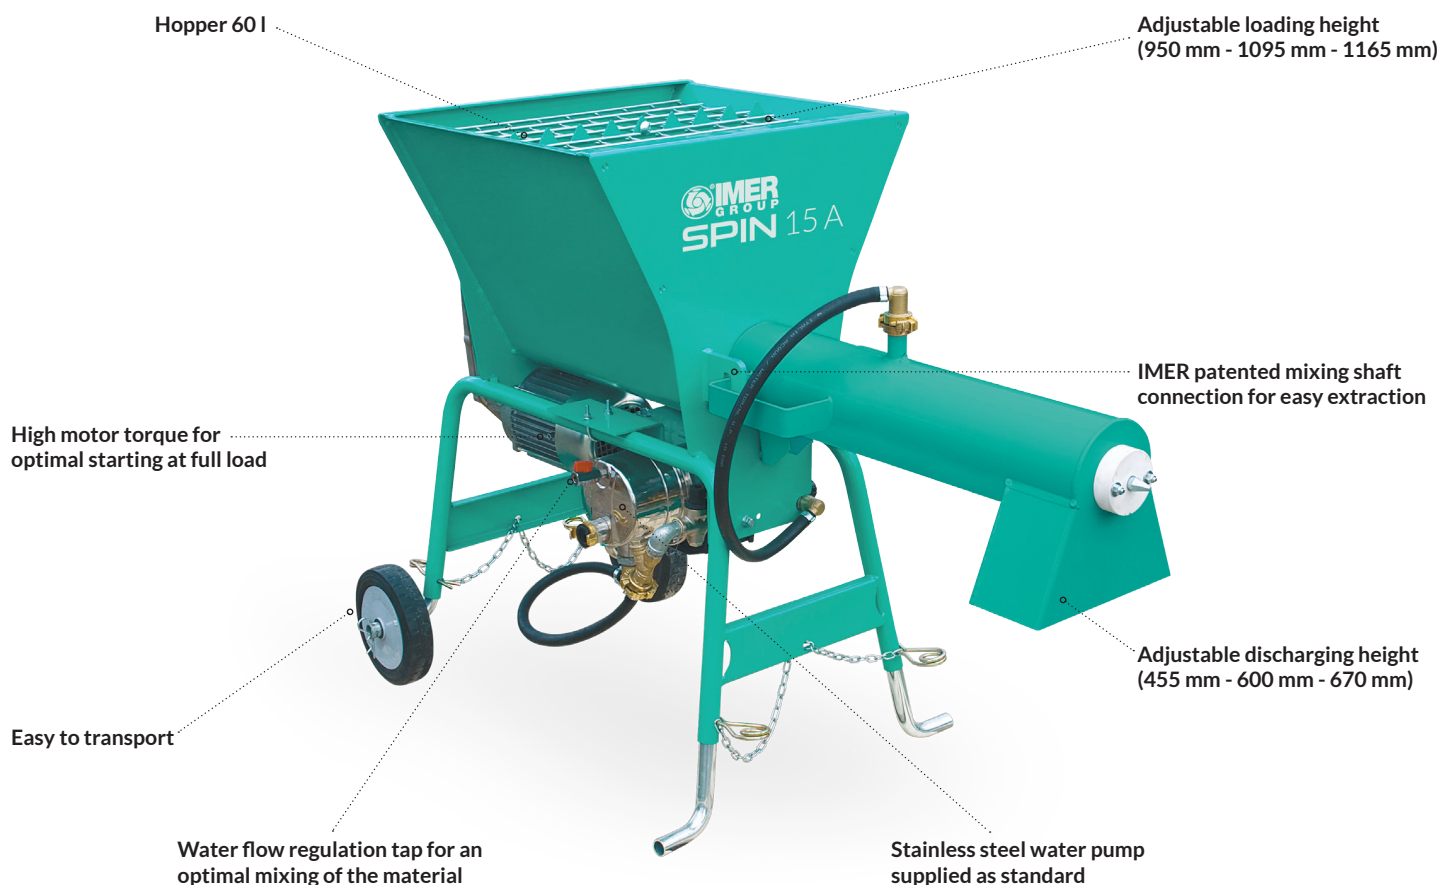

3 positions adjustable height




IMER patented parallel axes gearmotor with high efficiency that improves the transmission of the motion. The configuration with the motor under the hopper reduces the size and does not require maintenance and registration.



Patented IMER mixer coupling for an easy disassembling

High motor torque for optimum start-up with full load

Glues mixing kit (optional)



Flow meter kit (optional)



SPIN 15 A		
Hopper capacity	l	60
Mixing performance*	l/min	17
Mixer/paddle speed	rpm	280
Electric power supply	V / Hz	230 / 50 Sph
		230 / 60 Sph
		115 / 60 Sph
Electric motor power rate	kW	1.4
Standard water pump	kW	0.45
SPL in operator's position	dB(A)	<65
Weight (with packing)	kg	85 (89)
Dimensions w/l/h	mm	701/1380/1165-950 (max-min)
Box dimensions w/l/h	mm	800/590/830
Max stackability**		2 (h 1900 mm)

(*) The data relating to the hourly mixing performance are non-binding indicative values, which may vary according to the consistency of the materials.
 (**) Number of stackable pieces and total height including pallet.

