

Standard Equipment


- ✓ Work positioning lever
- ✓ IP67 plug
- ✓ Trolley available for use with a gantry
- ✓ Upper limit safety device
- ✓ Self-braking motor with magnetic device
- ✓ Bracket can be extended up to 1120 mm

Optional Accessories


- ✓ Scaffold clamps
- ✓ 3-pushbutton IP65 pendant control 1.5 m
- ✓ 3-pushbutton IP65 pendant control 5 m
- ✓ 3-pushbutton IP65 pendant control 30 m - low voltage

Applications

The low noise level allows working without causing noise harmful to the operator's health and bothersome to others.

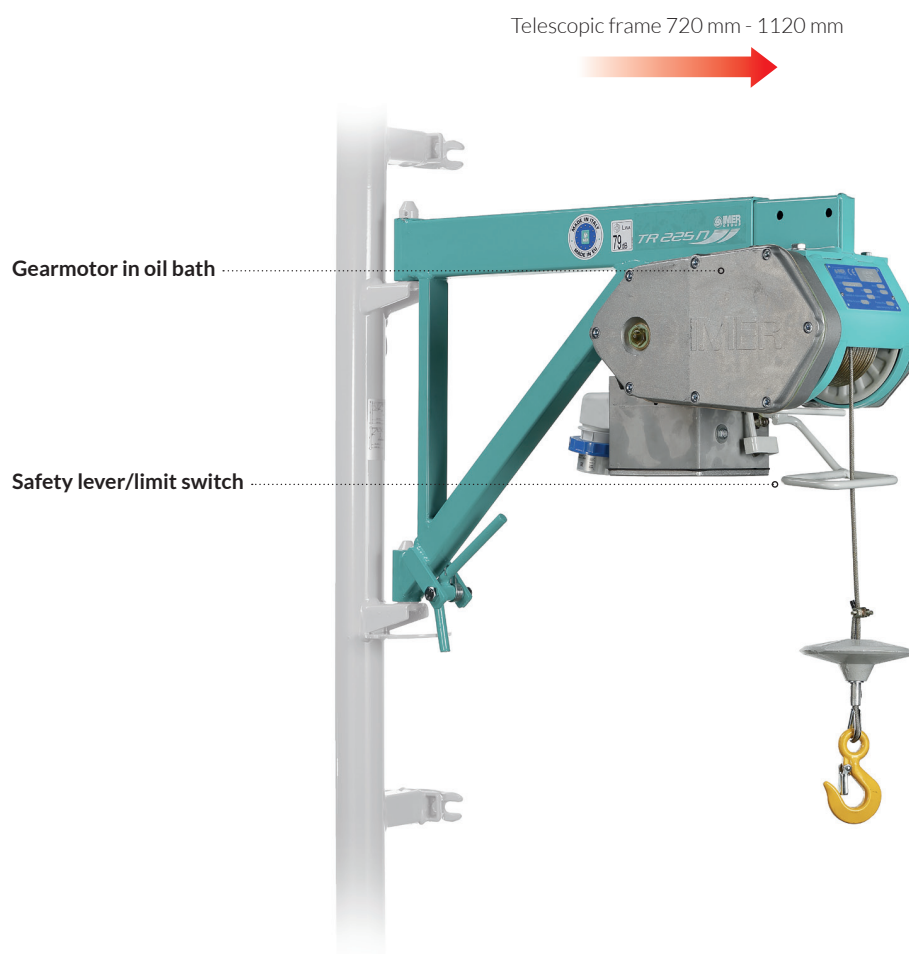

Telescopic frame 720 mm - 1120 mm

200 kg 

19 m/min 

30 m 

ARS 

HOISTS

TR 225N

Maximum capacity	kg	200
Av. full load lifting speed min/max	m/min	19
Max. working height	m	30
Ø wire rope	mm	5
Rope length	m	31
Electric power supply	V / Hz	230 / 50 Sph 110 / 50 Sph
Motor power rate	kW	0.75
Motor speed	rpm	1380
Running current 230 V (110 V)	A	7.2 (14)
Machine weight	kg	46
SPL in operator's position	dB(A)	<70
Dimensions w/l closed (open)/h	mm	330/770(1170)/520
Packing dimensions w/l/h	mm	350/820/500