



HORIZONTAL BATCHING PLANT FOR PRECAST





HORIZONTAL BATCHING PLANTS FOR PRECAST





MORE THAN 60 YEARS OF INNOVATION AT THE SERVICE OF THE BUILDING INDUSTRY



AGGREGATES SYSTEM

Horizontal | Vertical | Radius lift arm



DISTRIBUTION

Overhead concrete distribution systems



MIXING

Planetary pan mixers and twin-shaft mixers



MANAGEMENT SYSTEMS

Customized engineering of integrated management systems

STORAGE



HORIZONTAL

BATCHING PLANT FOR PRECAST FACTORIES

The ORU horizontal batching plants are designed and built for long operation even in extreme working conditions, a standard characteristic of every ORU product.

Particular design features make these machines easy to install, safe to operate and low in their maintenance requirements.

The standardization of some elements common to all versions, the modular construction, the different equipment combinations, and the vast range of accessories make it possible to increase the versatility of the batching plant, thus making it the ideal solution for any concrete batching requirement.

MODULAR CONSTRUCTION AND HOT GALVANIZING

The ORU aggregates storage units are made from modular elements which allow the almost complete interchangeability in the design phase and production ensuring the standardization of the product and significantly reducing the production time and allowing any future extensions of the storage unit without structural changes to existing elements.

To respond to the many requirements of building yards of different types (for clearances, dimensions, etc.), ORU proposes an accurate study capable of resolving the most diverse problems: from the installation of the batching plant to the delivery of the concrete (distribution, etc.), to the process of automation and prearrangement of the safety equipment, in compliance with applicable legislation.

The main structures are hot galvanized and this treatment ensures total protection from corrosive agents to which the plants are continuously subject and therefore a higher durability.

On request, the equipment can also be provided with paint coating over the galvanized surfaces.





AGGREGATE STORAGE AND COVERING

The dimensions of the compartments are such as to allow a considerable filling capacity, and the modularity of the hoppers simplifies their installation. The aggregate storage bin charging system is made to meet the specific requirements of each building yard.



PNEUMATIC DISCHARGE GATES

The aggregate is fed from the hoppers through electro-pneumatic discharge gates, with double speed in the closing phase. On request, the discharge systems can be of different type (by belt conveyor, by vibrating conveyors, etc.) and tailored to the requirements of the customer. When the aggregate is discharged through electro-pneumatic gates, the use of an adjustable mechanical limit switch controlling the opening of the discharge gate guarantees greater batching accuracy. The parts that undergo the aggregates friction, like discharging cones and the weighing hopper, are equipped with interchangeable wearing plates that ensure the structure durability.



BELTUP

Thanks to our BELTUP (patented) scale belt, costly concrete works are not needed (no pillars and no wells) and the storage bin loading point remains extremely low.



VIBRATING SYSTEM

To facilitate the discharge of particularly cohesive materials, vibrators have been installed on independent plates applied with a particular system to avoid negative stresses on the plant structure.



VIBRATING EXTRACTOR

The vibrating extractors are machines consisting of a spring-supported steel-plate conduit used to discharge the aggregate through the movement generated by electromechanical or electromagnetic vibrators. The machines are suitable for discharging aggregate of any grain size. The distinctive characteristics are metering precision, low noise, and practically maintenance-free operation.



LOADING CELLS

The aggregate and cement weighing system uses load cells applied directly to the supports of the respective hoppers, thus achieving an accurate and reliable weight measurement. The weighing system with load cells is type approved according to CE standards.



BELT EXTRACTOR

When high metering accuracy is necessary in feeding materials such as sand or crushed stone, the use of the extracting conveyor belt is a sure solution to the problem. The machine is equipped with a device signalling the presence of material, a flow regulator, and a manual cut-off gate for routine maintenance.



WEIGHING TROLLEY


As an alternative to the aggregates weighing belt, especially for plants with long storage units, we can provide our system with a weighing trolley.

TECHNICAL CHARACTERISTICS



Aggregates storage unit ORU ROME CZ

STORAGE UNIT ORU ROME CZ

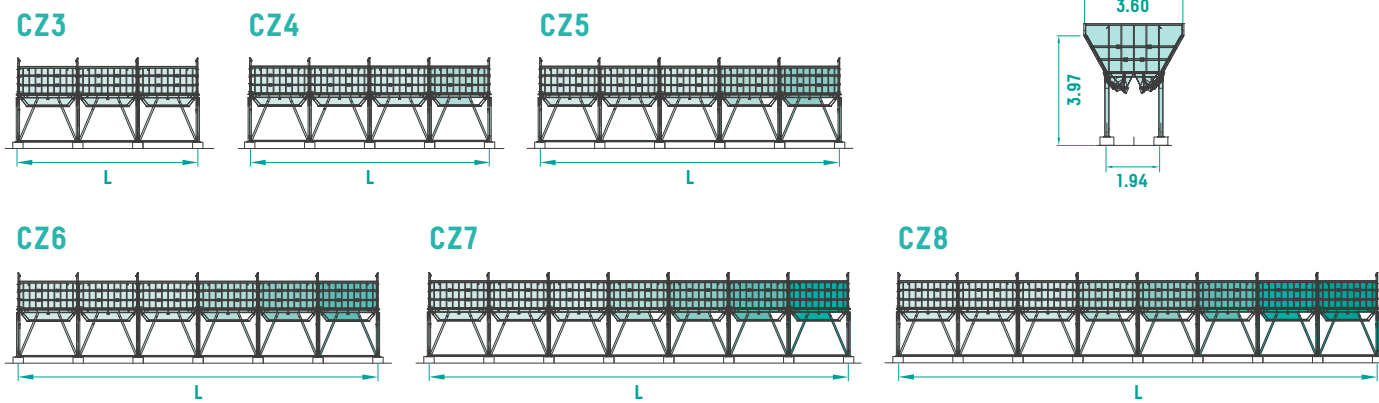

Storage (m³)	L (m)	WEIGHING BELT				
CZ3						
54	8.7	Width (m)	0.70	0.80	-	-
		Flow (m³/h)	190	266	-	-
		Length (m)	9.4	9.4	-	-
CZ4						
72	11.6	Width (m)	0.70	0.80	1.00	1.20
		Flow (m³/h)	190	266	350	460
		Length (m)	12.3	12.3	12.7	12.7
CZ5						
90	14.5	Width (m)	0.70	0.80	1.00	1.20
		Flow (m³/h)	190	266	350	460
		Length (m)	15.2	15.2	15.6	15.6

Storage (m³)	L (m)	WEIGHING BELT				
CZ6						
108	17.4	Width (m)	-	0.80	1.00	1.20
		Flow (m³/h)	-	266	350	460
		Length (m)	-	18.1	18.5	18.5
CZ7						
126	23.2	Width (m)	-	0.80	1.00	1.20
		Flow (m³/h)	-	266	350	460
		Length (m)	-	21	21.4	21.4
CZ8						
144	26.1	Width (m)	-	0.80	1.00	1.20
		Flow (m³/h)	-	266	350	460
		Length (m)	-	23.9	24.3	24.3




Aggregates storage unit ORU LOGIK WB



Aggregates storage unit ORU LOGIK WL


STORAGE UNIT ORULOGIK L3/4/5

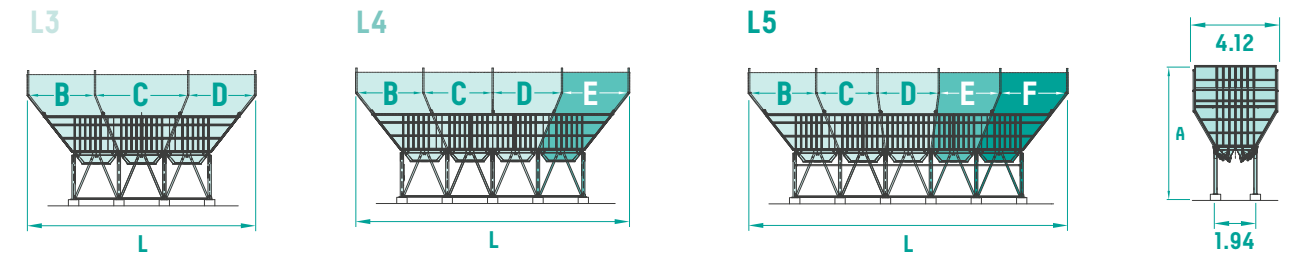

Storage (m³)	Extension walls (m)	A (m)	L (m)	B (m)	C (m)	D (m)	E (m)	F (m)
L3								
65	0	4.35	9.58	2.84	3.78	2.84		
105	1	5.35	11.25	3.24	4.65	3.24		
150	2	6.35	10.94	3.17	4.46	3.17		
L4								
80	0	4.35	11.78	2.84	2.96	2.96	2.84	
130	1	5.35	13.45	3.24	3.39	3.39	3.24	
180	2	6.35	13.14	3.17	3.30	3.30	3.17	
L5								
100	0	4.35	13.99	2.84	2.69	2.69	2.69	2.84
150	1	5.35	16.65	3.24	2.97	2.97	2.97	3.24
210	2	6.35	15.34	3.17	2.91	2.91	2.91	3.17

WEIGHING BELT	Straight Belt	Beltup
L3		
Width (m)	1.20	1.20
Flow (m³/h)	460	460
Length (m)	7.40	9.10
L4		
Width (m)	1.20	1.20
Flow (m³/h)	460	460
Length (m)	9.90	11.30
L5		
Width (m)	1.20	1.20
Flow (m³/h)	460	460
Length (m)	12.30	13.50

STORAGE UNIT ORULOGIK B4/5/6

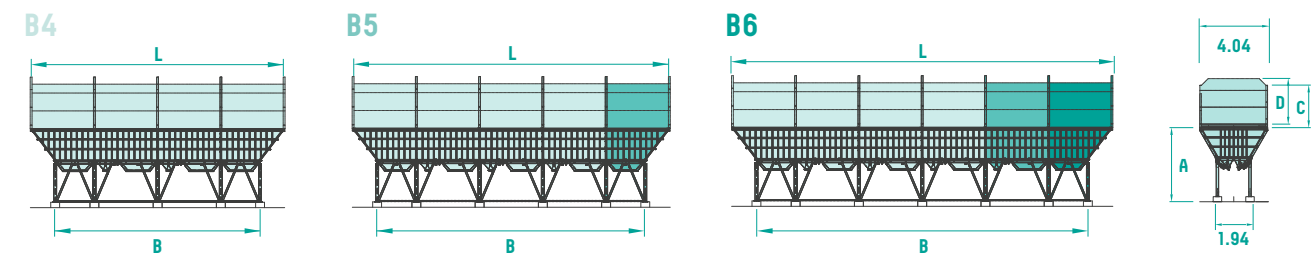

Storage (m³)	Extension walls (m)	A (m)	B (m)	C (m)	D (m)	L (m)
B4						
98	0	4.40		0.00	0.00	
122	0	4.40		0.50	0.70	
178	1	5.40	11.5	1.50	1.70	14.2
234	2	6.40		2.50	2.70	
B5						
124	0	4.40		0.00	0.00	
152	0	4.40		0.50	0.70	
222	1	5.40	15.05	1.50	1.70	17.75
294	2	6.40		2.50	2.70	
B6						
150	0	4.40		0.00	0.00	
184	0	4.40		0.50	0.70	
268	1	5.40	18.6	1.50	1.70	21.3
352	2	6.40		2.50	2.70	

WEIGHING BELT	Straight Belt	Beltup
B4		
Width (m)	1.20	1.20
Flow (m³/h)	460	460
Length (m)	12.70	14.30
B5		
Width (m)	1.20	1.20
Flow (m³/h)	460	460
Length (m)	16.00	17.80
B6		
Width (m)	1.20	1.20
Flow (m³/h)	460	460
Length (m)	19.40	21.30



DISTRIBUTION

OVERHEAD CONCRETE DISTRIBUTION

The ORU overhead concrete transportation system is the result of an engineering effort aimed at achieving maximum functionality and safety.

The choice of the ORU concrete distribution system enables prefabrication operators to draw the greatest advantage from the production capacities of their plants and, at the same time, to achieve a significant

reduction of the labour and costs involved in the transportation of the concrete.

The ORU transportation system makes it possible to maintain the characteristics of concrete intact up to the casting phase. Each phase of operation takes place in full compliance with applicable safety standards.

PRODUCT RANGE

[ORUFLY EDR 1000/1500/2000](#)

[ORUFLY EDR-BV 1000/1500/2000](#)

[ORUFLY EDC 1000/1500/2000](#)

[ORUFLY EDC-BV 1000/1500/2000](#)

VARIABLE SPEED ELECTRICAL TRANSLATION

ORU FLY is available in various versions: for **STRAIGHT RAILS (ORUFLY EDR)** and for **CURVED RAILS (ORUFLY EDC)**, with a rotating discharge hopper (ideal for fluid concrete) or through discharge shutters (**ORUFLY BV**).

The overhead skip is provided with a variable electromechanical system.

This system makes it possible to vary the maximum speeds, the speed on a curve or an incline, the approach speed.

The discharge system operated by hydraulic unit ensures the skip discharge even in the absence of supply voltage.

OVERHEAD SKIP ORU FLY EDR-EDC

The discharge with rotating skip is particularly suitable for fluid concrete, as this type of hopper guarantees maximum tightness, and the discharge system is particularly versatile. The skip can rotate to the right or left and can be stopped at any angle. This type of rotation allows a thorough washing of the hopper.



OVERHEAD SKIP ORU FLY EDR-EDC BV

The discharge with a twin-valve hopper is particularly suitable for semi-dry and, especially, dry concrete. With this type of hopper it is possible to feed paired hoppers.



CUSTOMIZED ORU FLY

We develop customized solutions to meet every need of our customers:


- uphill runways' solutions
- multi-hopper skip
- mobile concrete buckets
- customized hopper design




ORUFLY EDR

MODEL DIMENSIONS (MM)

	A	B	C	D	E	F	G	H
1000	1700	1750	865	1180	700	1400	2540	1765
1500	1880	2000	1010	1350	800	1600	2735	1905
2000	1950	2060	1080	1360	900	1630	2950	2135

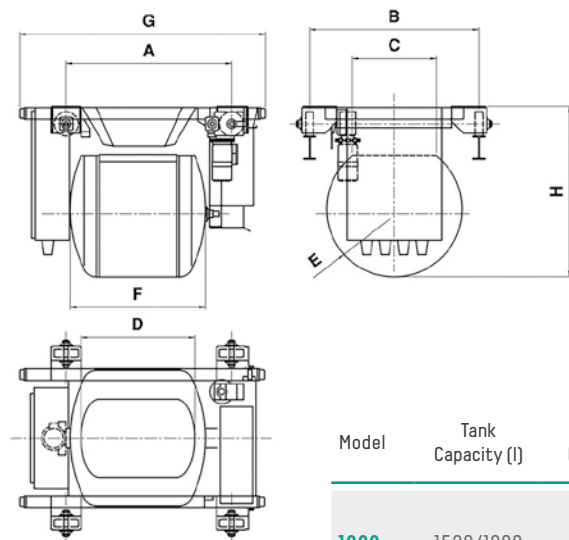

Model	Tank Capacity (l)	Speed (m/min)	Drive wheels (n)	Translation motors power (Kw)	Hydraulic unit power (Kw)	Bucket weight (Empty - Kg)	Bucket weight (Loaded- Kg)
1000	1500/1000	20-60	2	3	3	1600	4100
		30-120	2	5,5	3	1580	4080
		30-180	2	7,5	3	1650	4150
1500	2250/1500	20-60	2	4	4	1950	5700
		30-120	2	7,5	4	1950	5700
		30-180	2	7,5	4	1950	5700
2000	3000/2000	20-60	2	7,5	4	2200	7200
		30-120	2	9,2	4	2200	7200
		30-180	2	11	4	2200	7200

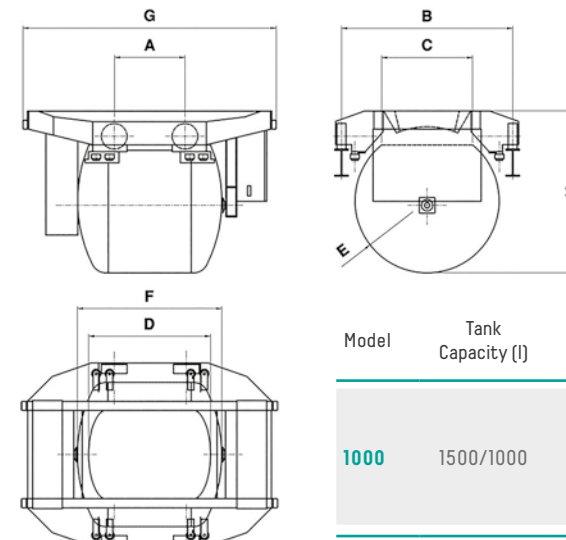

ORUFLY EDC

MODEL DIMENSIONS (MM)


	A	B	C	D	E	F	G	H
1000	800	1800	865	1180	700	1400	2520	1650
1500	800	1900	1010	1350	800	1600	2825	1800
2000	800	2000	1080	1360	900	1630	3040	2105

Model	Tank Capacity (l)	Speed (m/min)	Drive wheels (n)	Translation motors power (Kw)	Hydraulic unit power (Kw)	Bucket weight (Empty - Kg)	Bucket weight (Loaded- Kg)
1000	1500/1000	30-60	2	1,85x2	3	1500	4000
		30-120	2	3x2	3	1550	4050
		30-180	2	3x2	3	1550	4050
		30-240	4	2,2x4	3	1550	4200
1500	2250/1500	30-60	2	3x2	4	1850	5700
		30-120	2	4x2	4	1850	5700
		30-180	2	4x2	4	1850	5700
		30-240	4	3x4	4	2000	5750
2000	3000/2000	30-60	2	3x2	4	2100	7100
		30-120	2	5,5x2	4	2150	7150
		30-180	2	5,5x2	4	2150	7150
		30-240	4	4x4	4	2300	7400


ORUFLY EDR-BV

MODEL DIMENSIONS (MM)

	A	B	C	D	E	F	G	H
1000	1935	1640	1210	1240	755	1350	2550	1580
1500	2000	2020	1460	990	1460	1500	2875	1445
2000	2350	2060	1450	990	1450	1860	3225	1895

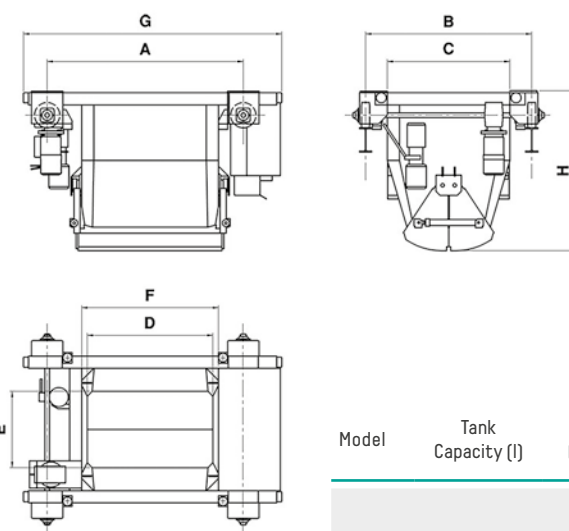

Model	Tank Capacity (l)	Speed (m/min)	Drive wheels (n)	Translation motors power (Kw)	Hydraulic unit power (Kw)	Bucket weight (Empty - Kg)	Bucket weight (Loaded- Kg)
1000	1500/1000	20-60	2	3	3	1250	3750
		30-120	2	5,5	3	1280	3780
		30-150	2	7,5	3	1280	3780
1500	2250/1500	20-60	2	4	3	1800	5550
		30-120	2	7,5	3	1800	5550
		30-150	2	7,5	3	1800	5550
2000	3000/2000	20-60	2	7,5	3	2200	7200
		30-120	2	9,2	3	2200	7200
		30-150	2	11	3	2200	7200

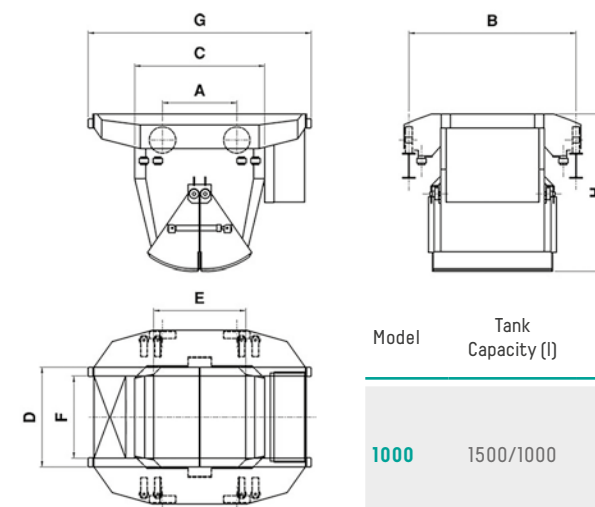

ORUFLY EDC-BV

MODEL DIMENSIONS (MM)

	A	B	C	D	E	F	G	H
1000	800	1800	1410	1115	980	890	2400	1690
1500	800	1900	1500	1200	980	1000	2605	1890
2000	800	2000	1600	1280	980	1080	2740	2140

Model	Tank Capacity (l)	Speed (m/min)	Drive wheels (n)	Translation motors power (Kw)	Hydraulic unit power (Kw)	Bucket weight (Empty - Kg)	Bucket weight (Loaded- Kg)
1000	1500/1000	30-60	2	1,85x2	3	1500	4000
		30-120	2	3x2	3	1550	4050
		30-180	2	3x2	3	1550	4050
		30-240	4	2,2x4	3	1700	4200
1500	2250/1500	30-60	2	3x2	3	1680	5430
		30-120	2	4x2	3	1680	5430
		30-180	2	4x2	3	1680	5430
		30-240	4	3x4	3	1830	5580
2000	3000/2000	30-60	2	3x2	3	1960	6960
		30-120	2	5,5x2	3	2020	7020
		30-180	2	5,5x2	3	2020	7020
		30-240	4	4x4	3	2180	7180

The ORU overhead transportation system is generally provided with a casting crane that can be of bridge type, or of semi-portal or portal type, with or without operator on board and with automation features depending on the specific requirements of every customer. The bucket moving in any direction makes it possible to distribute the concrete in formworks of different shapes and sizes without the need of additional lifting or transportation means. On specific request, the bucket discharge system can be of different types: twin-valve, with rotating chutes, with wider mouths for discharging on extruders, with rotary hopper for discharging the concrete in a longitudinal or transversal direction. ORU can in any case supply special casting cranes to suit the requirements of the customer.

CASTING CRANE WITH VIBRATING EXTRACTOR SYSTEM



BRIDGE CASTING CRANE



CONCRETE CASTING CRANE



SEMI-PORTAL AND PORTAL CASTING CRANE



CASTING SYSTEMS

CASTING BUCKET COUPLED WITH CRANE



TRANSLATING BUCKET FOR DOUBLE SPAN



CASTING CRANE FOR HOLLOW CORE SLABS AND WALLS PRODUCTION WITH EXTRUDER & SLIPFORMER



TROLLEY-BUCKET ON THE GROUND



CASTING BUCKET WITH VERTICAL TRANSLATION



GREAT PERFORMANCE AND TOTAL COMPLIANCE WITH REGULATIONS

SPEEDCAST 5.0

SPEEDCAST is a mobile operating machine on wheels for the transport and laying of concrete and cement agglomerates in formworks and casting molds [S2-S3-S4 and beyond up to SCC class].

SPEEDCAST 5.0 has been designed to meet the needs of a particular sector of concrete distribution systems in the precast industry. The distribution usually takes place through overhead systems, special modular pipes line fed by stationary or mobile concrete pumps or through other more or less versatile systems.

SPEEDCAST represents a more versatile and efficient solution for the distribution of concrete within precast plant.

- Extremely low operating costs, thanks to simple and moderate maintenance both financially and in terms of time.
- Costs reduced to a minimum by using a single operator to manage transport and casting, allowing for greater profit margins.
- Excellent efficiency thanks to great manoeuvrability and control for high manoeuvring speed and casting precision.
- Extreme versatility. **SPEEDCAST** can be used in many different situations, ensuring a high return on investment. Rotation 90° clockwise - 90° anticlockwise.
- Exceptional manoeuvrability and power thanks to four-wheel drive (4x4) - four drive wheels with rear axle steering direction equal or opposite to front axle.



- EXTREME MOBILITY EVEN IN LIMITED SPACES AND DIFFICULT CONSTRUCTION SITES
- TOTAL CONTROL AND MAXIMUM SAFETY
- RELIABILITY AND VERSATILITY
- EXTREME MANEUVERABILITY AND SPEED OF WORK
- SIMPLE TO USE

EASY TO TRANSPORT



BY ROAD
WITH LOWERED TRAILER



BY SEA
IN CONTAINER OPEN TOP 40''
OVER HEIGHT H 2850

* After dismantling the hopper and tires



Thanks to the extreme maneuverability,
Speedcast makes any maneuver easy
even in tight and difficult to reach spaces



MOTORISED CARRIAGE		
All wheel drive	/	4x4
Drive wheels	N°	4
Front and rear lights complete with direction indicators		
TYRES		
385/65 R22.5 type	ø mm	1.070
Tread suitable for gravel (breccia) or work site conditions		
Tyres filled with high density polyurethane		
ENGINE (STAGE V - FINAL TIER IV)		
Yanmar diesel engine (TC)	N°	4 cilindri
Power	kW	53.7
Displacement	cc	3319
ENGINE (STAGE II - TIER II)		
Motore diesel TC Yanmar / Kubota	N°	4 cilindri
Power	kW	62.5
Displacement	cc	3319
CONCRETE HOPPER		
Vibrated SLWC capacity	m³	3
Water volume	m³	5.3
Rotation	°	± 90
Maximum incline	°	18
Presence of upper containment flanges in inclined position		
EXTRACTION SCREW CONVEYOR		
Discharge capacity	m³/h	60
Diameter	mm	323
Trough coating in Hardox 400	mm	4
Helical blade in Hardox		
TANKS		
Diesel fuel	l	115
Hydraulic oil	l	80
WEIGHTS		
Machine weight	Kg	9.900

COLOR MIX

CONCRETE DISTRIBUTION SYSTEM

In this sector and for this particular product, the IMER Group proposes dynamic solutions able to meet the ongoing evolution of customer requirements. Our R&D and mechanical/electrical engineering departments are heavily committed to assert the group's leadership in the prefabrication sector.

MANAGEMENT SYSTEM VERSATILITY


The Color Mix is complete with automation that integrates easily with the management software of concrete mixing plants. With the software installed it is possible to operate the equipment in a large variety of modes depending on the type of finished product. It can be combined with any type of plant.

Then it's possible to identify 3 main types of COLOR MIX, the to evolve and adapt to any situation at the job site:

HORIZONTAL COLOR MIX



The system is basically composed of 3 or 4 mobile hoppers (1), They are placed in line and translates under the discharging gate of the mixer. Each hopper can be loaded with a specific color and it is equipped with a variable dosing belt (2) and a calling probe (4) that ensures the constant filling. The translating extractor belt (3) loads the block machinery. The management of the speed and flow of variables extracting belts and the sequences, allows to obtain different color mix under total control by the operator.

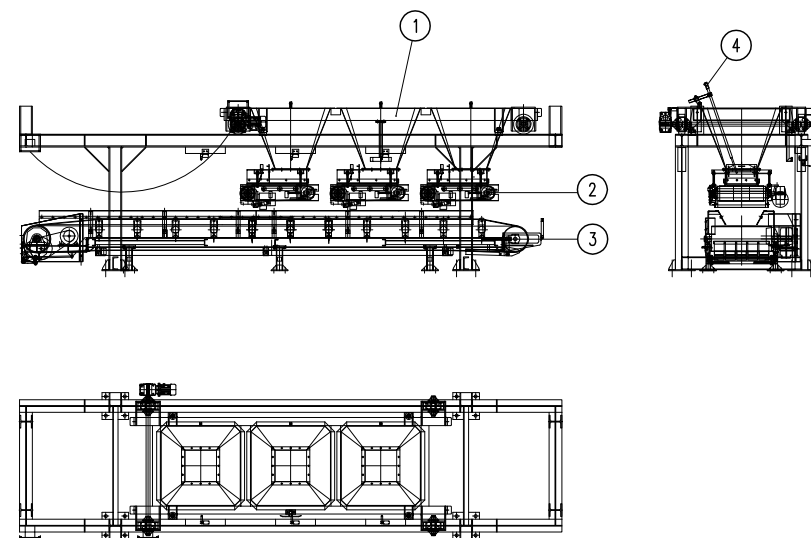


DISTRIBUTION




VERTICAL COLOR MIX

The system is composed of 3 fixed hoppers (1), each one positioned below the corresponding discharge gate of the mixer (max. 3), each one is equipped with a variable flow metering dosing belts (2) and a colling probe (4). The sliding extractor belt (3) ensures the supply of material to the block machinery according to the sequences of the color mix.

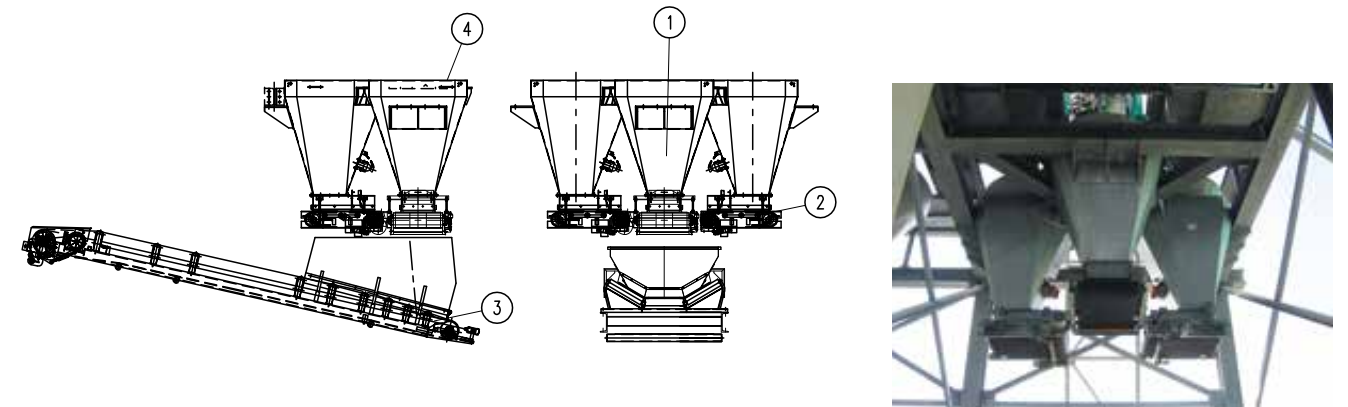

OVERHEAD COLOR MIX

The system is composed of an overhead trolley multi-compartment (1-4), for different colors. The overhead Color Mix runs on rails, between the mixer and the block machinery, downloading each color in the required proportions. The discharge of each color is allowed by a timed hydraulic gate or by a weight deduction system.

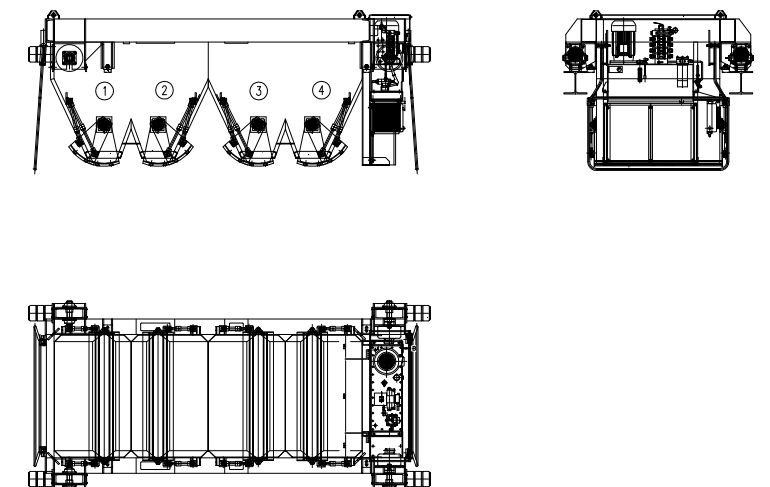

MIXING

IMER GROUP MIXERS

RELIABILITY AND PERFECT MIXING

Mixing is the most important phase in the concrete production process.

Indeed concrete **quality** and **costs** depend on **mixing** quality.

IMER GROUP mixers are the result of the meticulous and systematic analysis of problems concerning mixing materials of different sizes, shapes, consistency and specific weight.

Extremely **sturdy**, **reliable** and **versatile**, mixers are built with wear-resistant materials that allow maintenance reduction and can be applied in multiple production fields.



PLANETARY MIXERS

ORUMS

ORU MS planetary vertical mixers with coaxial motor can quickly mix any type of concrete with excellent results: **dry**, **semi-dry** or **plastic**.

They are used in the ready-mix and precast sectors and in the production of materials such as glass, ceramics, refractory material, cold asphalt, etc.

HORIZONTAL DUAL AXIS MIXERS

ORUMD

Thanks to our experience in the pre-mixing sector and to the introduction of technological innovations, the horizontal dual axis mixing line is able to pack **any type of concrete** (civil and industrial constructions, dams, lightweight concrete with low specific weight additives, mixes for foundations and stabilisers).

The ORU MD mixer line is equipped with two horizontal mixing axes rotating in sync in opposite directions.



ORU MS P

(ORU MS 500/330P AND 750/500P)

These two machine models are dimensionally and externally the same as standard mixers of the same size, but have a different internal layout.

The standard planetary mixer mainly mixes concrete with two principles:

- Revolution from the outside in and vice versa;
- Overturning material from the bottom up.

In addition to these two principles, “P” version machines apply a centrifugal action able to move material from the top down.

Thanks to a whisk, the “P” version is able to obtain a **very homogeneous mix** with lightweight aggregates, especially suited for bi-component objects and, specifically, finishing mixes for prestigious or visible surfaces.

Installed power and mixing times do not vary from the standard range.



ORUMS

SCRAPER AND MIXER BLADES

The **blade angles of incidence and profiles** were carefully designed to best exploit available power, reducing mixing and discharge times to a minimum.

The entire material mass is involved thanks to the ideal angle, guaranteeing high mix homogeneity. The blades are reversible to extend their working lives. Significant time savings and less wear are due to such an efficient mixing system.




Each mixing star holds **two or three** special steel **arms** with high elasticity, according to the model.

The **rounded arm shape** contributes to the lack of material accumulation during the mixing and discharge phases. The arms are coated with **wear-resistant lining** that guarantees “almost eternal” durability. Thanks to the fall stop system, arm regulation is simple, fast, perfect and safe. The **scraper blades** actively contribute to mixing, preventing material accumulation on the walls.

All blades can be made of **cast iron** or, upon request, **elastomer** with surface coating. Blade rotation and revolution speeds were designed to provide high productivity without creating material segregations with different specific sizes and weights.

Material movement in the tanks is gentle, gradual and continuous.

The graphic representation of a computerized technical analysis indicates how, after just one gear motor revolution, the blades fully cover the entire mixing tank surface in their movement.

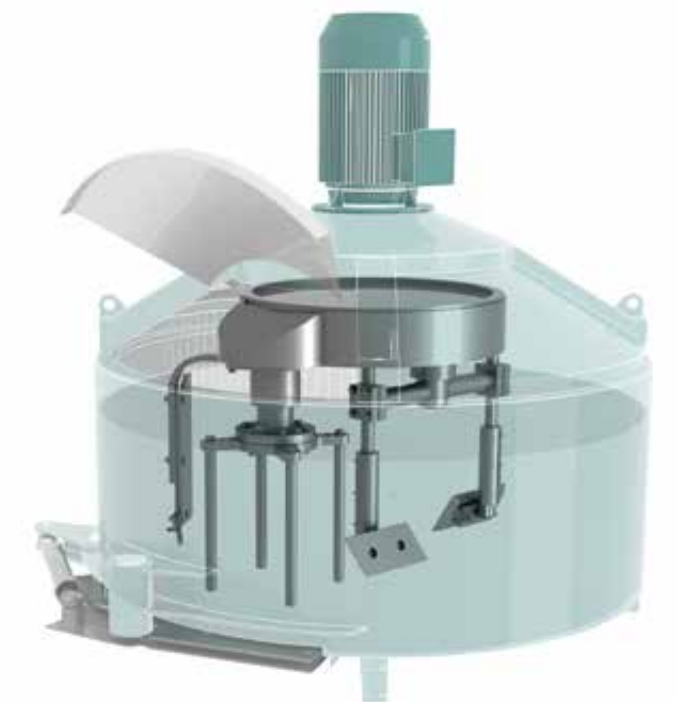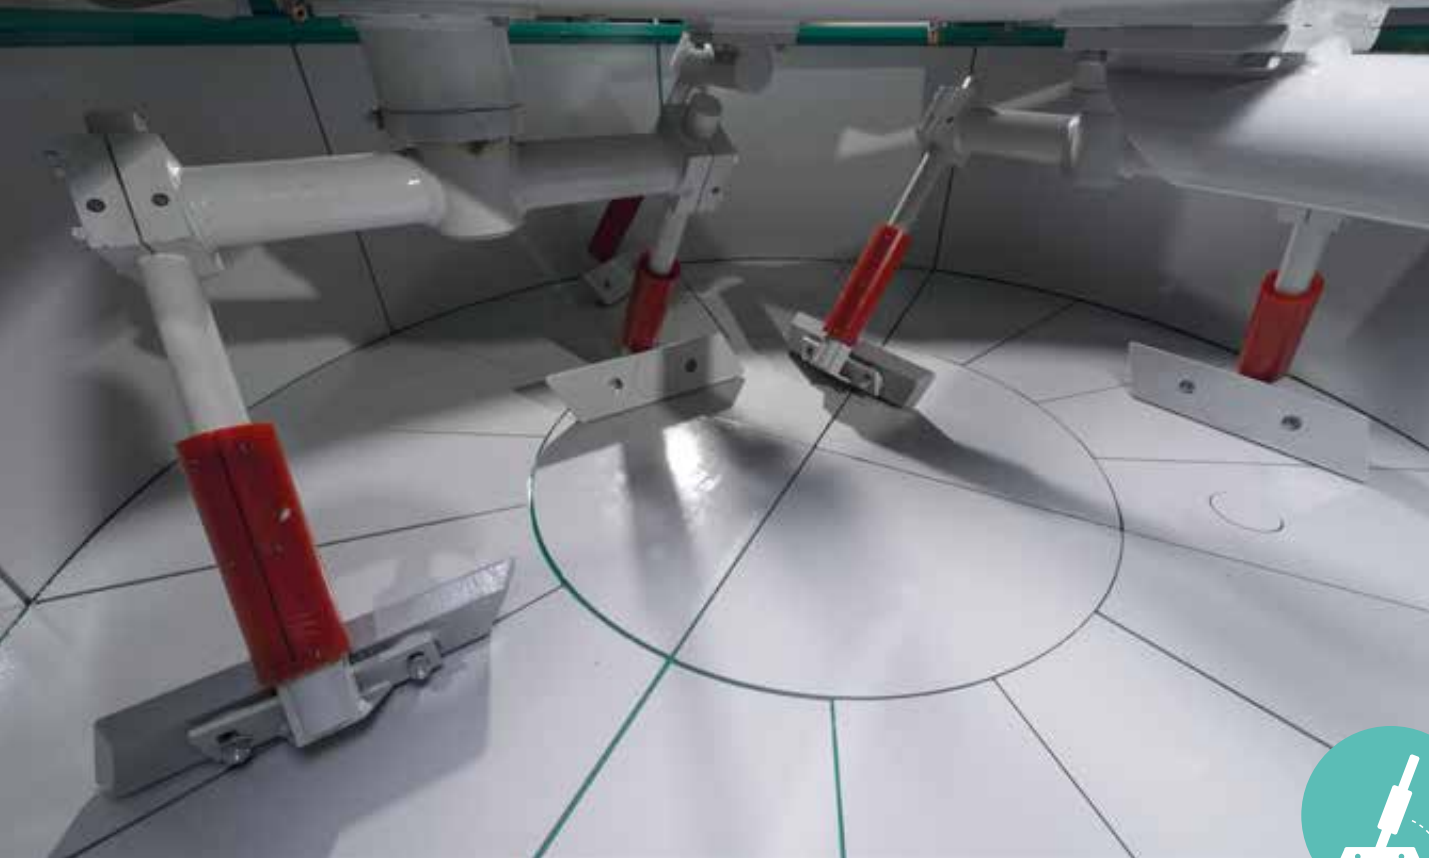



WATER EMISSION

The machine is set to be equipped with almost any automatic water dosing system (by weight or volume).

Water is emitted by a series of adjustable nozzles that distribute water over the entire mix surface.

Recycle **water** is directly emitted by a blade sprayer using a timed dosing system (upon request).



HYDRO-DYNAMIC JOINT

The oil bath planetary gear motor with hydro-dynamic joint is the heart of the machine. Indeed, the oil, subjected to a continuous

flapping by a special device, is forced upward within the gearcase, thus ensuring a constant lubrication of all moving devices.



WASHING SYSTEM

This equipment is available in manual and automatic version. The washing system, used during the cycle phases, allows the mixing of concretes with different colours or mix designs avoiding the

contamination of the batches. The frequent use (several times a day) makes the cleaning process at the end of the working day easier and more efficient.

DISCHARGE

The mixer **discharges** through a circular section door driven by an oil hydraulic cylinder. The door seal is made up of polyurethane gaskets. The door can be manually opened by a hydraulic pump in the event of emergency.



CLEANING AND MAINTENANCE EASE

The wide opening angle on the covers permits easy access to the mixer interior. The lack of sharp corners and the rounded shape of the arms permit easy and fast cleaning.



MOISTURE MIX PROBE

For automatic water dosing control.



SAFETY SYSTEM WITH KEY CODE

Safe access door opening device.



CONCRETE PICKING DEVICE

For laboratory tests and special products (optional).



ORUMD




MIXING TANK

The mixing tank is expanded in relation to the amounts to be mixed to quickly obtain a high quality mix.

The mixing tank is made with **larger press-bent edges** to simultaneously provide the structure with sturdiness and elasticity.

The tank lining is made up of small bolted and interchangeable elements, made of **special wear-resistant steel**. Their rotation in the various positions significantly lengthens working life.

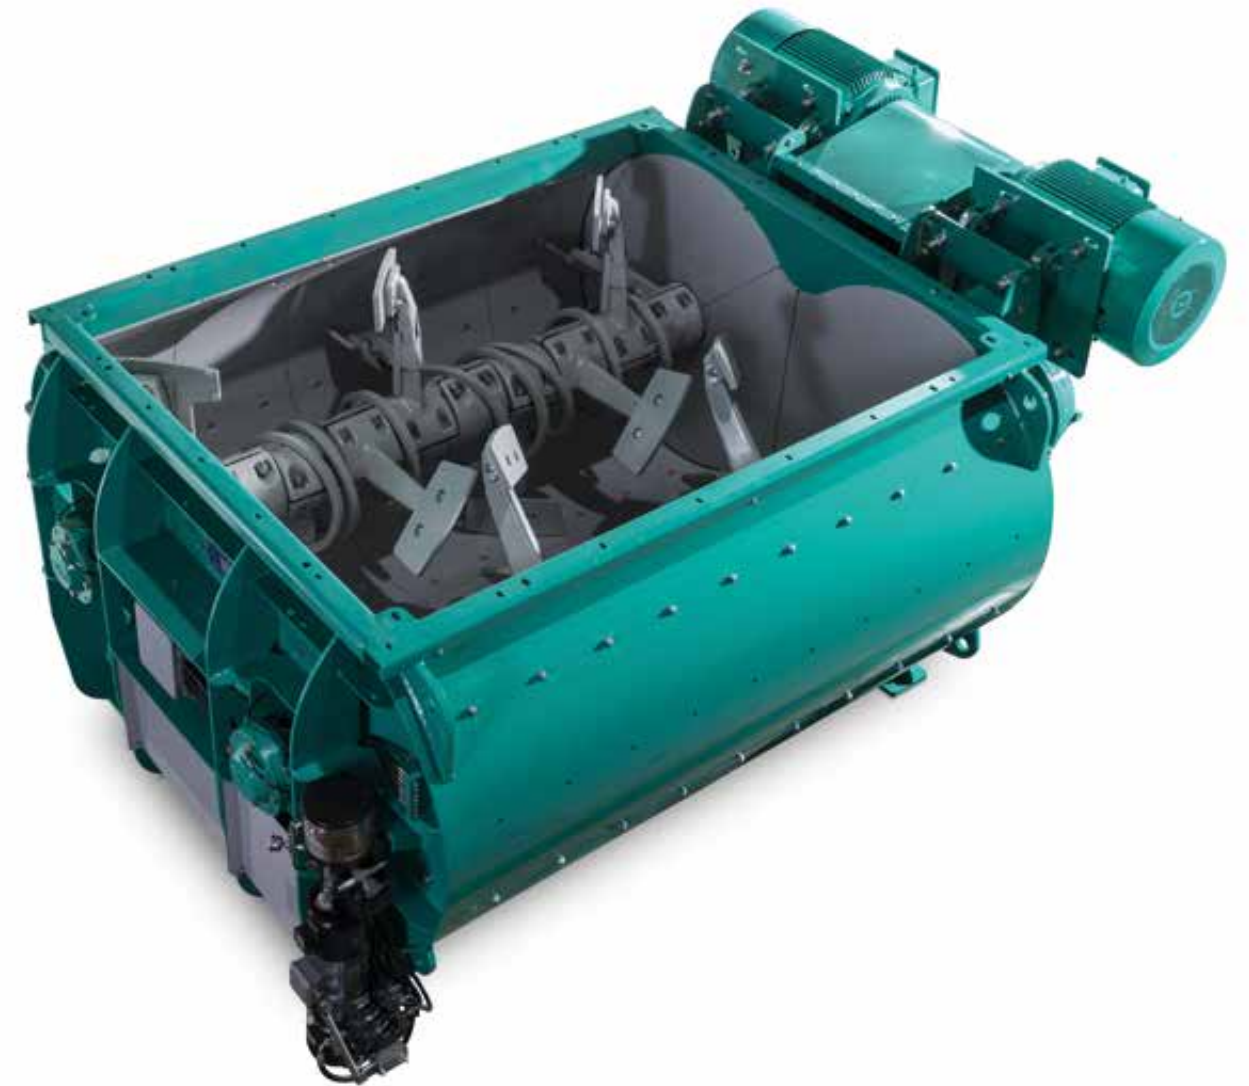

SEALING SYSTEMS

The sealing systems installed on our machines' mixing axes are fully reliable.

The automatic and centralised lubrication system, equipped with 4 independent pumps, is highly efficient and its action, combined with our sealing system, significantly reduces maintenance.



MIXING BLADES AND ARMS

The **arms** are protected by easy-to-replace **wear-resistant plates** that help to improve mixing, thanks to the larger contact area, while they avoid arm wear during the pre-mixing process.

The blades, installed on the arms, are made of **anti-wear high-resistant steel** with a profile designed to **optimise performance** and reduce mixing time.

The **blade and arm tilt** causes the mix to move according to two counter-rotating propellers, partially overlapping, to obtain completely forced mixing, both horizontally and vertically.

Any lightweight material centrifuge and floating separation phenomenon is excluded.



GEAR MOTORS

Gear motors are equipped with an infeed pinion set with an expanded service factor to eliminate any possible overheating even in heavy-duty work conditions.

DISCHARGE DOOR

The discharge door is equipped with interchangeable lining, adjustable contrast blades and a gasket system able to guarantee an excellent sealing even with very fluid mixes. The door extends over the entire length of the mixing tank and permits full and fast discharge. The door can be manually opened by a hydraulic pump in the event of emergency.



OPENINGS AND INSPECTION DOORS

Inspections and maintenance are made easy by the large openings and doors with protection grates. All elements meet the most stringent international safety regulations.

4-PUMP LUBRICATION SYSTEM



WATER SYSTEM

The system permits even water distribution over the entire surface, guaranteeing fast mix homogenisation.



COMPLETE LIST OF ACCESSORIES FOR ORU MS MIXER

- AUTOMATIC HIGH PRESSURE MIXER CLEANING SYSTEMS
- AUTOMATIC MICROWAVE MOISTURE DETECTION SYSTEMS
- HOT WATER OR STEAM HEATING SYSTEMS
- COOLED WATER OR ICE COOLING SYSTEMS
- AGGREGATE/SKIP/CONVEYOR BACKUP HOPPER
- CONCRETE BACKUP HOPPER
- ADDITIVE SYSTEM BY WEIGHT, VOLUME OR TIMED
- LIQUID OR POWDER COLOUR DOSING SYSTEM
- DUST VACUUM AND RECOVERY SYSTEM
- UP TO TWO ADDITIONAL CIRCULAR SECTION DISCHARGE DOORS DRIVEN BY OIL HYDRAULIC CYLINDER WITH PARTIAL OR FULL OPENING
- AIRBAG
- CONCRETE SAMPLING DEVICE
- HARD SINTERED METAL BASES AND CASE

- MIXING BLADES WITH ELASTOMER OR VIDIA METAL SURFACE COATINGS
- METALLIC FIBRE DOSING SYSTEM
- PLASTIC FIBRE DOSING SYSTEM
- TEMPERATURE PROBES
- 1- OR 2-COMPARTMENT CEMENT SCALE



Technical specifications

ORU MS RANGE		ORUMS 500/330	ORUMS 500/330P	ORUMS 750/500	ORUMS 750/500P	ORUMS 1200/800	ORUMS 1500/1000	ORUMS 2250/1500	ORUMS 2250/1500S	ORUMS 3000/2000	ORUMS 3750/2500
Load capacity	l	500	500	750	750	1200	1500	2250	2250	3000	3750
Load capacity	kg	790	790	1200	1200	1900	2400	3600	3600	4800	6000
Soft yield	l	478	478	725	725	1160	1450	2175	2175	2900	3625
Vibrated yield	l/kg	330	330	500	500	800	1000	1500	1500	2000	2500
Mixing and discharge time	sec.	45	45	45	45	46	45	60	45	60	60
Stars and blades	n.	1x3	1x2	1x3	1x2	1x3	2x2	2x2	2x2	3x2	3x2
Scraper blades	n.	1	1	1	1	1	1	1	1	1	1
Tangent blades	n.	-	-	-	-	-	1	1	1	2	2
Differential case	r.p.m.	16	16	16	16	14.7	12.4	10.4	12.4	10.4	10.4
Star	r.p.m.	46	46	46	46	44.5	42	35.4	42	35.4	35.4
Mixing power	kW	15	15	18.5	18.5	30	45	55	75	110	110/132*
Oil hydraulic unit power	kW	2.2	2.2	2.2	2.2	3	3	3	3	3	3
Weight	kg	1800	1900	2000	2100	3500	4800	5500	5600	8800	8800
Whisk (r.p.m.)	r.p.m.	-	150	-	150	-	-	-	-	-	-

* 110 kW S3 - S4 concrete / 132 kW with inverter S1 - S2 concrete

COMPLETE LIST OF ACCESSORIES FOR ORU MD MIXER

- AUTOMATIC HIGH PRESSURE MIXER CLEANING SYSTEMS
- AUTOMATIC MICROWAVE MOISTURE DETECTION SYSTEMS
- HOT WATER OR STEAM HEATING SYSTEMS
- COOLED WATER OR ICE COOLING SYSTEMS
- AGGREGATE/SKIP/CONVEYOR BACKUP HOPPER
- CONCRETE BACKUP HOPPER
- ADDITIVE SYSTEM BY WEIGHT, VOLUME OR TIMED
- LIQUID OR POWDER COLOUR DOSING SYSTEM
- DUST VACUUM AND RECOVERY SYSTEM
- BLADES THICKENED WITH 500 HB OR HIGH-RESISTANT CHROME CAST IRON
- AIRBAG

- AUTOMATIC AND CENTRALISED LUBRICATION SYSTEM
- TEMPERED STEEL TANK LINING
- CLEANING RINGS
- SECOND DOOR INSTALLATION UPON REQUEST



Technical specifications

ORU MD RANGE		ORUMD 3000/2000	ORUMD 3750/2500	ORUMD 4500/3000	ORUMD 5000/3350
Load capacity	l	3000	3750	4500	5000
Load capacity	kg	4740	5930	7100	7900
Vibrated yield	l	2000	2500	3000	3350
Cycle time	sec.	55	60	65	70
Max inert size	mm	0-150	0-150	0-150	0-150
Mixing power	kW	2x37	2x45	2x55	2x65
Mixing blades	n.	12	16	20	20
Oil hydraulic unit	kW	1.5	1,5	1,5	1,5
Skip load capacity	l	3000	3750	4500	5000
Standard skip speed	m/min	35	35	37	37
Skip power	kW	30	37	45	55
Weight (without Skip)	kg	7100	8200	9300	9500

MANAGEMENT SYSTEMS




The IMER Group management units for the concrete batching plants are “user friendly” systems able to plan, control, automatically coordinate all the plant operations and to constantly check the production process. Our management systems are also available in touch version.




MOISTURE MIX PROBE

The moisture mix probe installed on the bottom of the mixer measures and displays the percentage of moisture contained in the mix. A correct positioning contributes towards a correct measurement of moisture. To ensure a precise w/c ratio it is very important to interface the probes with an automation system able to accurately process the data. Thanks to the specific software for the microwave reading of the moisture probe, it is possible to achieve a high level of water metering accuracy.


HPS 2100-P / 3100-P

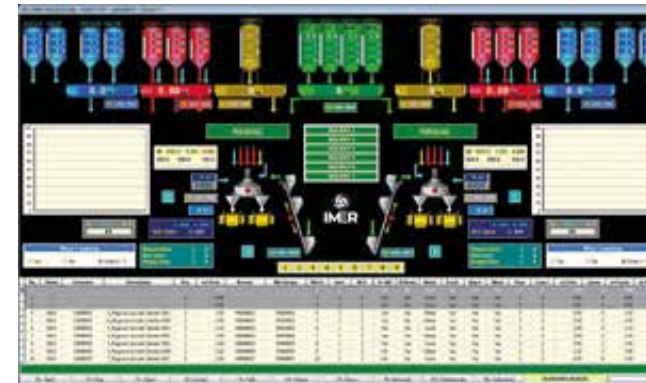


Customized software solution for the automation of the most advanced concrete production for the precast industry.

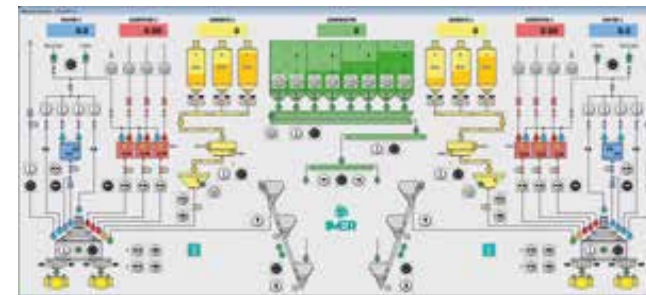

User-friendly interface. Extremely intuitive and simple to use.

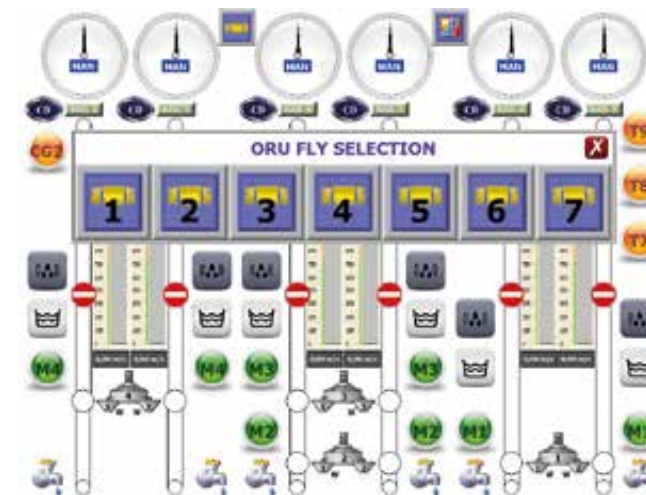

DA-MULTI Management Unit for one or more overhead skips.

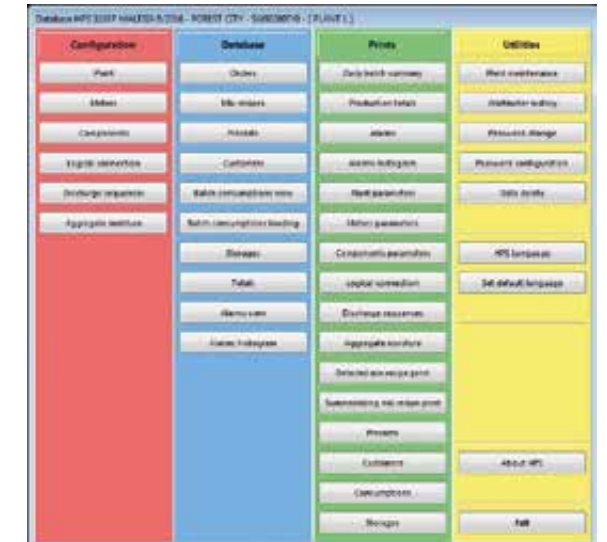

The HPS Database application (Data management) provides the following functions: Management of the plant configuration (operating parameters, meters, components, mix recipes, etc.); Processing of the data stored during the batches (consumptions, storage, production totals, etc.); Historical data display (alarms, batches, etc.); Printouts (configuration, consumptions, alarm reports, batches, totals, etc.); Data backup and restore procedures called HPS Backup Files and HPS Restore Files are present, which allow the operator to save the configuration data as well as the historical data. Whenever necessary it is possible to restore the previously saved files.

DA-MULTI is an automatic/manual management system of overhead trolley for stationary or mobile discharging stations, equipped of collision avoidance systems. The skip is equipped with plc on board and radio connection, receives calls from the HPS control system and manages the required operations independently. The system is fitted with a central control panel equipped with touch-screen terminal where all the functions are displayed:

- running operations
- real time diagnosis
- reporting of any possible anomalies during the working operations
- it is possible to modify all the operating parameters of the skip from the touch-screen terminal.

DA-MULTI Management Unit is completely customizable according to the production needs.

