

Scaffold attachment for hoist / winch

For better distribution of the stress on the scaffold caused by using the hoist. Equipped with plate for locking the work positioning lever.

For hoist

Max. capacity: 200 kg
(150 kg with hoist with telescopic frame and swivelling extension)


Weight: 18 kg



For AP Series winches

Max. capacity: 150 kg

Weight: 15 kg

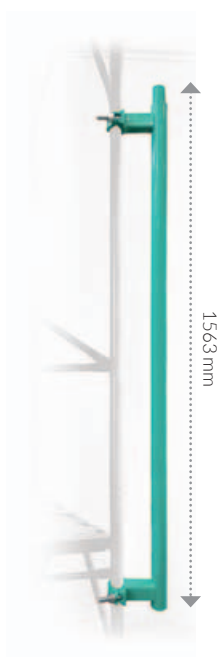


Window prop

Useful at construction sites or for refurbishment jobs with little work space. Easy and quick installation, without using assembly tools.

Max. capacity: 200 kg

Weight: 44 kg

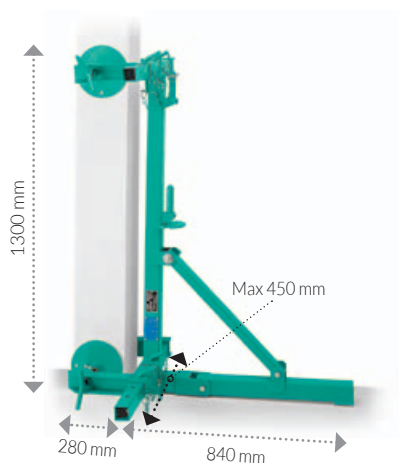

Internal adjustable prop

For using the hoists indoors or where there are no external scaffolding structures; height adjustable from a min. of 2.45 m to a max. of 3.3 m.

Conversion kit internal-external

(to be combined with the internal adjustable prop): to install hoists outdoors where there are no overhanging support points of support; equipped with ballast container.

Max. capacity: 200 kg

(150 kg with hoist with telescopic frame and swivelling extension)


Weight: 44 kg



Max. capacity: 200 kg

(150 kg with hoist with telescopic frame and swivelling extension)

Weight: 100 kg

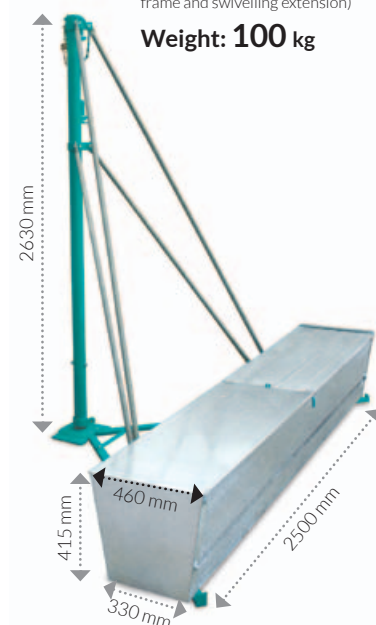

Handle for hoist

Useful for transporting the hoist on the construction site.


Suitable for the TR-ET-E-ETR series (models previous to the NEO range).

Weight: 0.65 kg



Fixing kit for gantry 300-500 kg

For mounting the 300 kg and 500 kg gantries on a floor in place of the ballasts in the event that these are not usable for reasons of space.

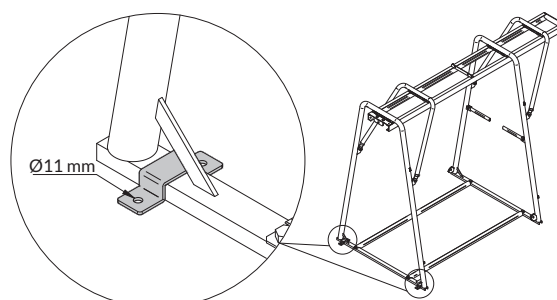


ACCESSORIES for HOISTS

Prop and ballast container for AIRONE 300 NEW

Max. capacity: **300** kg


Tot. weight (prop + ballast container): **140 kg**

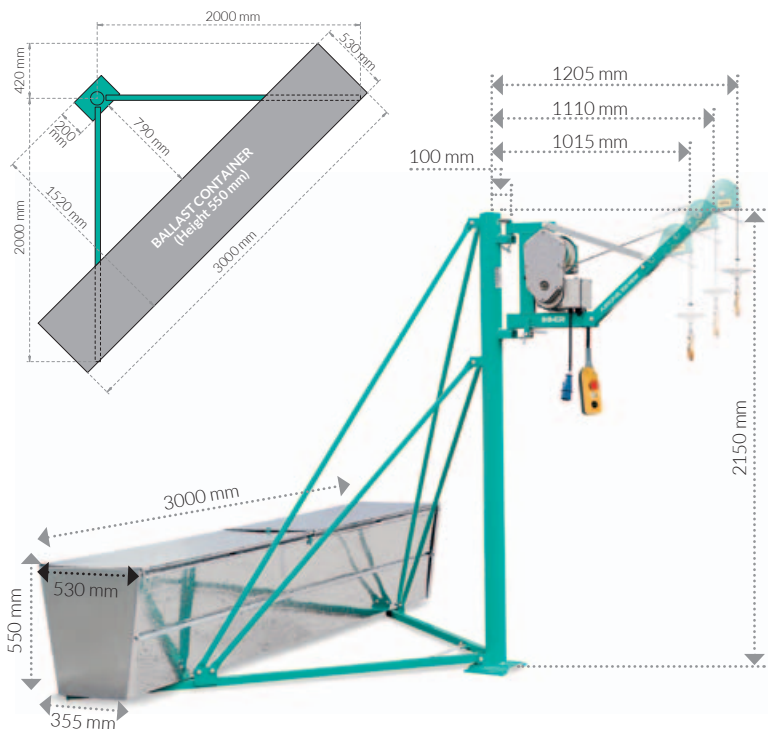

Gantries with capacity 300 kg and 500 kg

Suitable for all IMER hoists, except for Airone 200 and Airone 300

Max. capacity: 300 kg / 500 kg

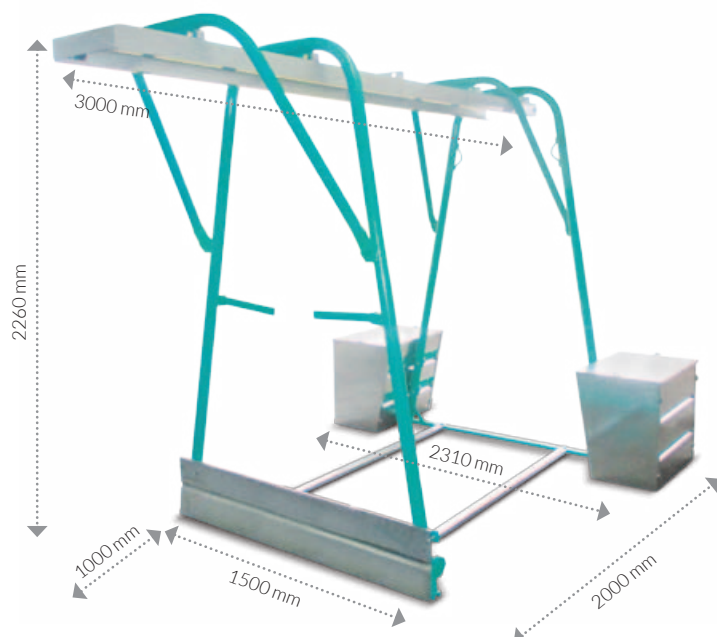


Swivelling extensions

- For prop/scaffold attachment with work positioning lever (A)
- For clamp attachment with work positioning lever (B)

For lifting bulky material with fixed bracket hoists, allowing the loading distance to be increased 360 mm, with carrying capacity reduced to 150 kg; for increasing the loading distance with extendible bracket hoists up to 1,480 mm, with carrying capacity reduced to 150 kg.

Max. capacity: **150** kg

Weight: **13** kg

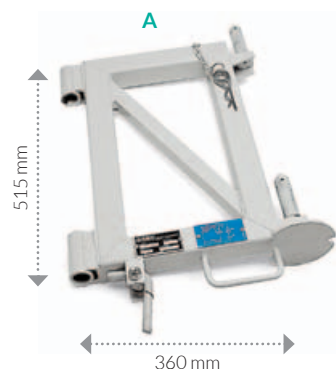


Max. capacity: **150 kg**

Weight: 7 kg



Gantry with capacity 1000 kg

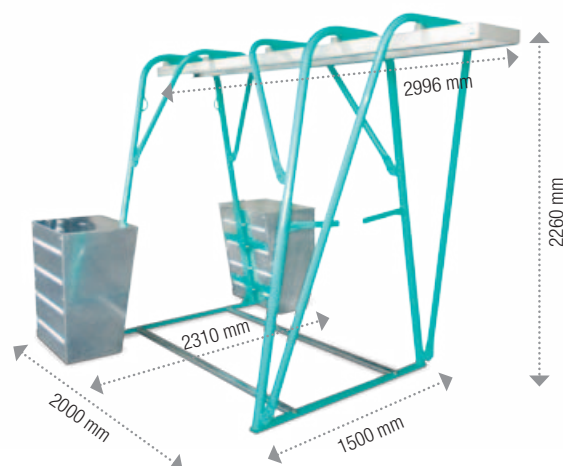


**AVAILABLE ONLY FOR
NON-EU COUNTRIES**

Transformation kit for 500 kg gantry to 1000 kg gantry



Hoist trolley

Weight: **8 kg**



Three-way scaffold frame lifting hook

Max. capacity: **60 kg**


Weight: **3 kg**



Two-bucket carrier

Max. capacity: **70 kg**


Weight: **4 kg**

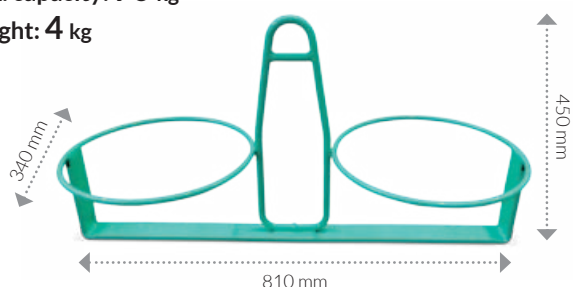

Four-bucket carrier

Max. capacity: **150 kg**


Weight: **8 kg**

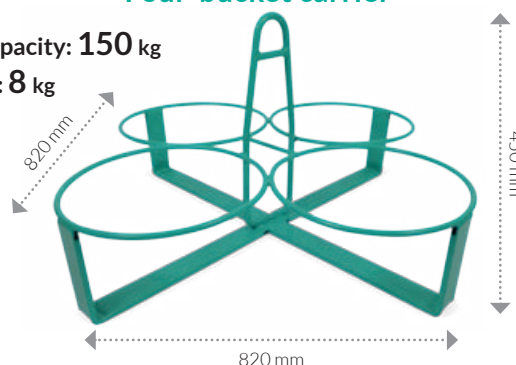

Wedge-shaped bucket 45/90/120 litres

Max. capacity: **150/200/300 kg**

Weight: **12/15/19 kg**

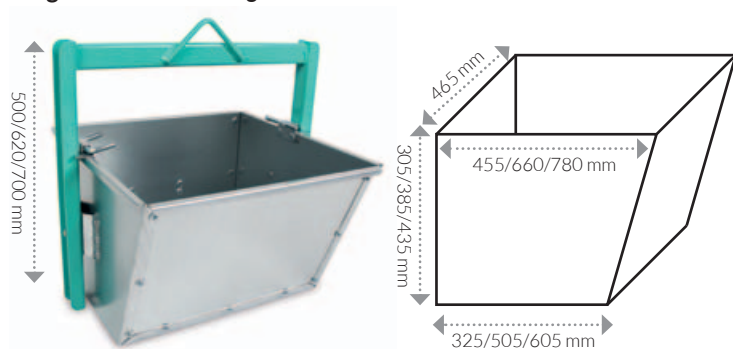

Scaffold clamps

Max. capacity: **200 kg**

Weight: **25 kg**



Lifting kit for hoists ARGO

For installing the hoist on scaffold attachment or internal prop. Suitable for all NEO range hoists and previous models without an attachment point, and also for previous versions of internal prop without holes.

Tot. weight: **15 kg**



Hoist protection cover

Tear-proof and waterproof, with three sets of straps to be easily fixed to the scaffold attachment or internal prop.

Standard for all the NEO range hoists. Adaptable to all hoist models.

