

Standard Equipment

- ✓ Skip fitted to mount self-loading shovel
- ✓ Skip with rounded corners to facilitate material unloading
- ✓ STCS (Self Tension Crawler System)
- ✓ Shovel arms with double attachment yoke
- ✓ Hydraulic quick-coupling for shovel system release
- ✓ Tipping accessories support frame; rapid accessories changeover
- ✓ Steel bearings with greasing points at pivot points
- ✓ Removable engine bonnet for better access for checks, servicing and refuelling
- ✓ Standard power take-off with adjustable flow rate 13/26 l
- ✓ Mono-directional power take-off for concrete mixer
- ✓ Cartridge air filter with visual clog indicator
- ✓ Larger water/oil cooler
- ✓ Foldable footplate




Accessories

CODE	DESCRIPTION
1108140	TAURUS 1300 C-D20AE Yanmar TNM68 diesel engine, electric start, tipping bucket
1108141	TAURUS 1300 CP-D20AE Yanmar TNM68 diesel engine, electric start, tipping bucket and self-loading shovel
1108143	TAURUS 1300 A-D20AE Yanmar TNM68 diesel engine, electric start, trilateral unloading bed

CODE	DESCRIPTION
1108180	Accessories mounting kit TAURUS 1300/1000
1108146	Tipping bucket kit TAURUS 1300/1000
1108147	Self-loading shovel kit TAURUS 1300/1000 (to be assembled on tipping bucket)
1108148	Tipping bucket and self-loading shovel kit TAURUS 1300/1000
1108185	350L concrete mixer and self-loading shovel TAURUS 1300/1000
1108182	Trilateral unloading bed TAURUS 1300/1000
1108166	Track LONG LIFE Taurus 1300/1000 (1 pcs)


**TAURUS 1300 / tipping bucket
with self-loading shovel**

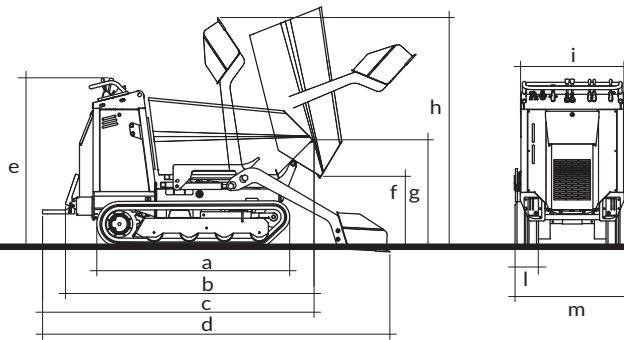

DIMENSIONS (mm)

a	b	c	d	e	f	g	h	i	l	m
1485	1915	2130	2710	1320	550	830	1795	790	200	900


TAURUS 1300 / trilateral unloading bed

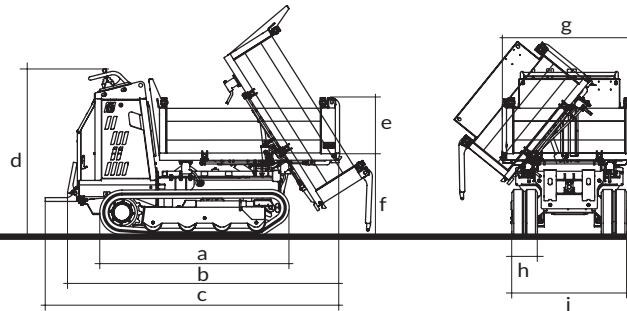

DIMENSIONS (mm)

a	b	c	d	e	f	g	h	i
1485	2125	2340	1320	350	655	1050	200	900

**TAURUS 1300 / concrete mixer
with self-loading shovel**

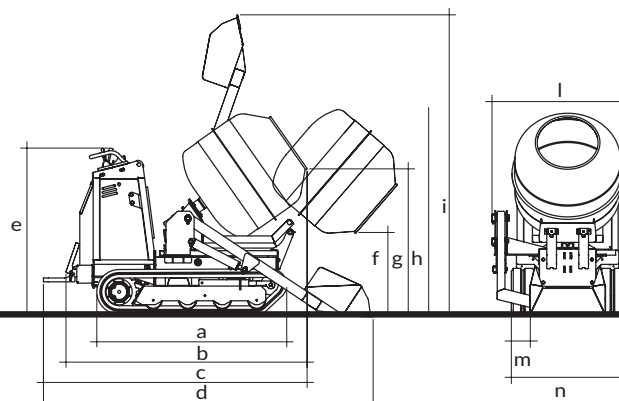

DIMENSIONS (mm)

a	b	c	d	e	f	g	h	i	l	m	n
1485	1880	2095	2605	1320	660	1155	1580	2345	1040	200	900

TAURUS 1300		
Engine		Yanmar TNM68 diesel
Engine power	kW / rpm	14.7 / 3600
Electric start		yes
Operating load	kg	1300
Skid capacity	mc	0.5
Speed	km / h	2.5 / 4
Max allowed slope when empty (guide with operator on the ground, where applicable)		20° - 36% *
Max allowed slope when loaded (guide with operator on the ground, where applicable)		11° - 20% *
Concrete mixer kit (drum capacity/yield capacity)	l	350 / 280
Trilateral unloading bed dimensions l/w/h	mm	1300/970/350
Controls		Servo-assisted hydraulic control
Hydraulic tank capacity	l	16
Traction motor		Wheel drive (axial motor + reduction gear) with brake motor (parking)
Batteries	V / Ah	12 / 60
Machine weight with tipping bucket	kg	830
Machine weight with tipping bucket and self-loading shovel	kg	900
Machine weight with trilateral unloading bed	kg	930
Machine weight with concrete mixer and self-loading shovel	kg	960

(*) Variable based on the configuration